

PRODUCT NOTE

# ABB Ability™ Smart Sensor for hazardous areas

## Condition monitoring for rotating machines in explosive atmospheres



The ABB Ability™ Smart Sensor for hazardous areas monitors the health and performance of rotating machines operating in explosive atmospheres. ATEX, IECEx and NEC 500 certified, it detects potential machine disturbances before they impact on reliability, productivity and safety.

01

01 High-performance ABB Ability™ Smart Sensor for rotating machines operating in explosive atmospheres

### Overview


The ABB Ability™ Smart Sensor for hazardous areas extends the reach of condition-based maintenance for rotating machines, such as motors and pumps. The remote condition monitoring solution tracks the health and performance of equipment operating in potentially explosive environments such as chemical plants, mines and mills.

Equipment installed in hazardous or remote locations may be difficult to inspect regularly and, therefore, operated until failure. Using the ABB Ability™ Smart Sensor, equipment can be remotely monitored, anticipating any problems and scheduling preventive maintenance.

The Smart Sensor can be used with ABB and third-party machines. It is simply attached to the equipment's housing or frame. No wiring or machining is required. The quick installation and activation allows monitoring and data collection to begin immediately.

### Benefits

- Condition-based maintenance for lower servicing costs – maintenance can be planned according to actual needs rather than generic schedules
- Process optimization for lower operating costs
- Extended equipment lifetime
- Increased personnel safety by enabling remote maintenance inspections
- ATEX, IECEx and NEC 500 certified – compliant with strictest requirements for equipment operating in potentially explosive atmospheres
- Quick installation and activation for instant monitoring
- Easily retrofitted to ABB or third-party equipment

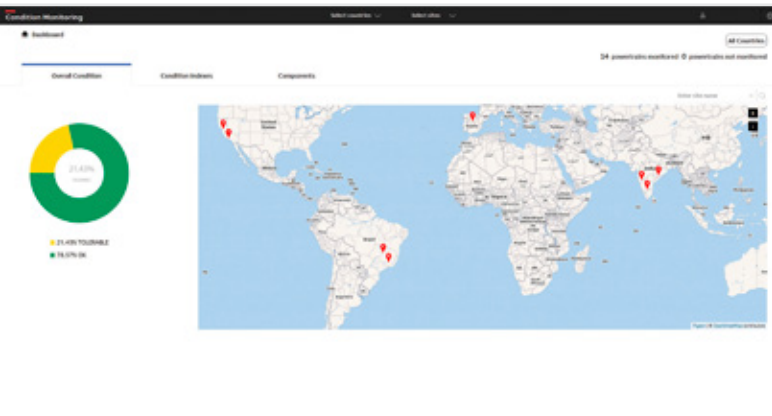

01

01 ABB Ability™ Smart Sensor web portal

02 ABB Ability™ Smart Sensor condition monitoring solution: The sensor transmits the data via a smartphone or gateway to a secure cloud service. Advanced algorithms analyze the data and convert it into meaningful information, which is sent to the user's smartphone and customer portal.

The solution can also be integrated into the customer's own systems.

### Sensor features

#### Certified for hazardous areas

The ABB Ability™ Smart Sensor for hazardous areas is designed for harsh environments. Its enclosure withstands high vibration levels and protects the sensor from total dust ingress (IP66/67). The sensor is certified for ATEX, IECEx and NEC 500.

#### Pinpoint detection accuracy

The Smart Sensor features the latest sensor technology including accelerometers, magnetometer and ultrasonic microphone. Even slight anomalies in the equipment's condition can be detected at a very early stage.

The sensor's mechanical design allows the transducers to pick up the true machine vibrations independent of resonances that may occur.

#### Long battery life

The sensor's battery life is up to three times longer than that of most competing designs.

#### Same hardware for different assets

The same sensor can be optimized for different rotating machines, such as motors and pumps. Reconfiguration is done within minutes, saving time and reducing stock holding.

#### Connectivity

The Smart Sensor supports Bluetooth® 5 or WirelessHART communication protocols.

### Accessing information

Various levels of details on the equipment's health and performance can be obtained through the following interfaces:


#### ABB Ability™ Digital Powertrain

- **Web portal** – complete dashboard for operators to view condition and performance trends, access historical data, manage user access rights and set alerts and alarm.
- **App** – interface to the equipment's status for technicians on the factory floor. A 'traffic light' display gives an easy overview of the condition of all the monitored equipment.
- **User's own system** – the Smart Sensor data can be integrated into a user's own system via the Smart Sensor Cloud Interface.

#### ABB Ability™ AssetInsight

- **Plant level monitoring** – Smart Sensor data can be integrated with data from other ABB monitoring solutions and external data sources into one aggregated view of a large-scale system. AssetInsight™ supports both on-premise and cloud deployments.

02

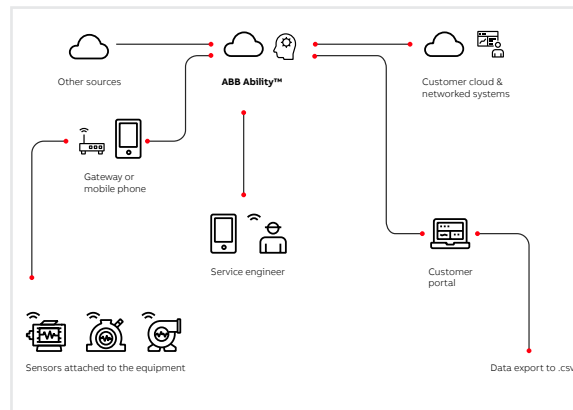

<b>SPECIFICATIONS</b>	
<b>Temperature measurement (machine skin temperature)</b>	
Measurement range	-40 °C to +85 °C
Resolution	0.1 °C
Accuracy	+/-0.5 °C
<b>Vibration measurement</b>	
Acceleration, low frequency (x, y, z direction)	
Amplitude range	0.03 - 157 m/s <sup>2</sup> (16g)
Frequency bandwidth	0.1 Hz – 1.5 kHz
Acceleration, high frequency (z direction)	
Amplitude range	0.1 - 450 m/s <sup>2</sup> (50g)
Frequency bandwidth	100 Hz – 20 kHz
<b>Magnetic field measurement</b>	
Magnetic field (x, y, z direction)	
Amplitude range	1 – 1600 µT
Frequency bandwidth	0.1 – 250 Hz
<b>Ultrasonic sound measurement</b>	
Microphone	
Amplitude range	0.6 mN/m <sup>2</sup> – 20 N/m <sup>2</sup>
Frequency bandwidth	100 Hz – 80 kHz
<b>Wireless communication</b>	
Communication standards	Bluetooth® 5.0, Bluetooth® Low Energy WirelessHART (HART 7.4)
Radio standard	IEEE 802.15.4
Frequency	2.4 GHz, license free ISM band
Range (nominal)	>200 m @ line of sight
<b>Security</b>	
Encryption	128-bit AES encryption
Authentication	IEC 62351 (role-based access control)
<b>Power</b>	
Battery type (not replaceable)	Lithium Thionylchloride
Battery design life	15 years operation under standard conditions
<b>Environmental</b>	
Temperature	Operation: -40 °C to +80 °C Storage: <30 °C
IP class	IP66/67 (dust-tight and resistant to powerful water jetting and submersion)
Chemical tolerance	See chemical tolerance sheet for PBT (Polybutylene terephthalate)
<b>Certifications</b>	
Hazardous areas	Ex ia I Ma -40 °C ≤ Tamb ≤ +85 °C (Mining) Ex ia IIC T4 Ga -40 °C ≤ Tamb ≤ +85 °C (Gas) Ex ia IIIC T157 Da -40 °C ≤ Tamb ≤ +85 °C (Dust) CI I, Div 1, Gr A, B, C and D T4 CI II, Div 1, Gr E, F and G T4 CI III, Div 1
Radio	EN 300 328 v.2.1.1 EN 301 330 v.2.1.1 FCC/IC
<b>EMC</b>	
Immunity	EN/IEC 61000-6-2
Emission	EN/IEC 61000-6-3
<b>Physical</b>	
Dimensions	82 mm x 69 mm x 45 mm (W x D x H)
Weight	185 g
Case material	Stainless steel/reinforced PBT
Mounting	On equipment housing or frame. Please consult installation manuals. M6 or UNF ¼" / 28 screw



—  
For more information, please contact  
your local ABB representative or visit:

**[www.abb.com/smartsensor](http://www.abb.com/smartsensor)**

—  
We reserve the right to make technical  
changes or modify the contents of this  
document without prior notice. With re-  
gard to purchase orders, the agreed par-  
ticulars shall prevail. ABB Ltd does not ac-  
cept any responsibility whatsoever for  
potential errors or possible lack of infor-  
mation in this document.

We reserve all rights in this document and  
in the subject matter and illustrations con-  
tained therein. Any reproduction, disclo-  
sure to third parties or utilization of its  
contents – in whole or in parts – is forbidden  
without prior written consent of ABB Ltd.  
Copyright© 2020 ABB  
All rights reserved